During the Sub-Committee discussion of RED1-28, Philip Fairey of FSEC provided context and information on the CO2e Index (CRI) from the presentation below.

Sub-Committee was concerned that a maximum CO2e Index of 55 was too low for the Appendix and preferred to start with something more reasonable. 65 is shown below, in the context of the CRI's achieved by all-electric above-code homes.

Carbon Rating Index Evaluation

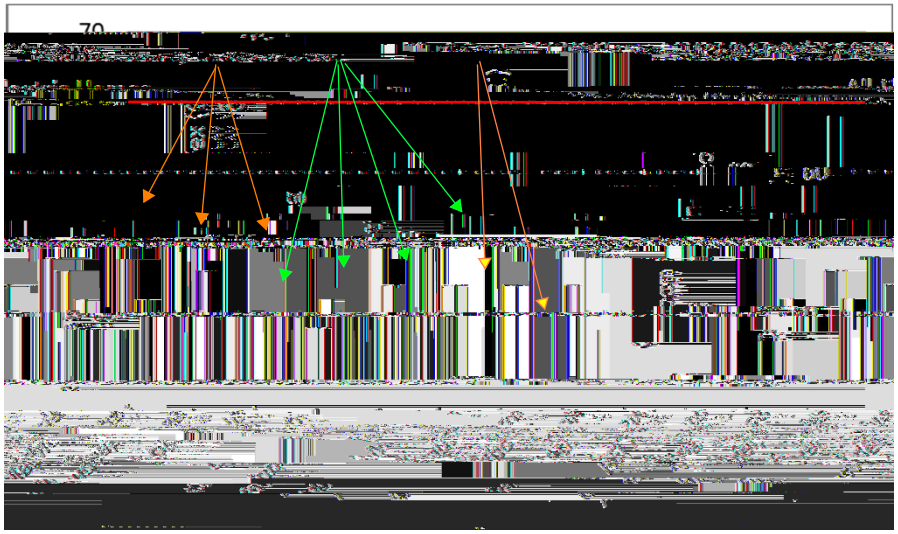

Sub-Committee expressed some concerns and questions about information provided on the label / certificate and whether it will cause confusion for homeowners.

Regardless of whether the rating is used for code compliance or not, all homeowners receive a certificate similar to below when an an energy rating is performed on their home in accordance with ANSI/RESNET/ICC 301, which lists ERI, CO2e Index, address, projected CO2e emissions, projected annual site energy, and projected annual energy costs.

ASHRAE 90.2 Home: Atlanta

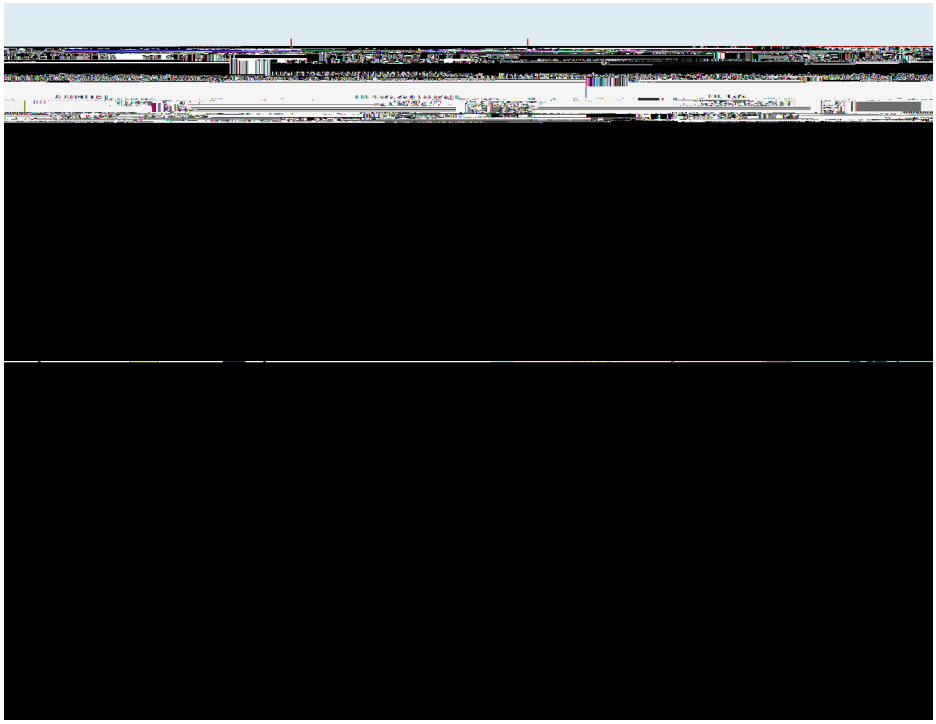

%2

UCF

FSEC Energy Research Center

Proponent: Jay Crandell, ABTG/ARES, representing FSC

Revise proposal as follows (only highlighted changes)

Additional suggested edits added per feedback from RE Envelope sub

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	RED1260-22 Editorial revision
CDP ID #	.28 Tm-[k•

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	RED1310-22 Demand recirc water system edit
CDP ID #	í ï ñ í ®
Code	/ Z ®
Code Section(s)	R403.5.1.1.1
Location	base
Proponent	Alisa McMahon ® u u Z } v X P › } Æ X v š
Proposal Status	® ^ Œ À
Subcommittee	RE HVACR & WH
Subcommittee Notes	® W Œ • v š š] } v o] Discussion started with a motion to approve "as modified" with an appropriate second. Questions and comments that came up during the discussion. 1. Question recommended distance language in R403.5.1.1 text in red. 2. Comment R403.5.1.1.1 strike out recommendation temperature. 3. R403.5.1.1.1.2 and 3 simplify language with recommendation adding friendly amendment to the "as modified"

Copyright © 2021 International Code Council, Inc.

where:

AF = Total glazing area.

A_s = Standard reference design total glazing area.

FA = (Above-grade thermal boundary gross wall area)/(above-grade boundary wall area + 0.5 × below-grade boundary wall area).

F = (above-grade thermal boundary wall area)/(above-grade thermal boundary wall area + common wall area) or 0.56, whichever is greater.

and where:

- Thermal boundary wall is any wall that separates *conditioned space* from unconditioned space or

Copyright © 2021 International Code Council, Inc.

Copyright © 2021 International Code Council, Inc.

TABLE R405.4.2(2) DEFAULT DISTRIBUTION SYSTEM EFFICIENCIES FOR PROPOSED DESIGNS[e]

DISTRIBUTION SYSTEM CONFIGURATION AND CONDITION	FORCED AIR SYSTEMS	HYDRONIC SYSTEMS[f]
Distribution system components located in unconditioned space	NA	0.95
Distribution system components entirely located in conditioned space[g]	NA	1
"Ductless" systems[h]	1	NA

e. Default values in this table are for untested distribution systems, which must still ~~meet minimum requirements from~~ form comply with Section R403 ~~for duct system insulation~~.

f. Hydronic systems ~~shall~~ means those systems that distribute heating and cooling energy directly to individual spaces using liquids pumped through closed-loop piping and that do not depend on ducted, forced airflow to maintain space temperatures.

g. Entire system in conditioned space ~~shall~~ means that no component of the distribution system, ~~including the air-handling unit,~~ is located outside of the conditioned space.

h. Ductless systems ~~shall be~~ are allowed to have forced airflow across a coil but ~~shall~~ must not have greater than 10 ft. of ~~any~~ ducted airflow external to the ~~manufacturer's air-handler enclosure~~ space conditioning equipment.

SECTION R408

ADDITIONAL EFFICIENCY REQUIREMENTS

Revise as follows:

TABLE R408.2 CREDITS FOR ADDITIONAw 0.-16.5 ( )]TJ -0.0s45D(st)18.3 ( ) 0.002 Tw 12.96 -0 0 12.96 3

Copyright © 2021 International Code Council, Inc.

SECTION R502 ADDITIONS

Revise as follows:

R502.2.2 Heating and cooling systems. HVAC *ductwork* ~~ducts~~ newly installed as part of an *addition* shall comply with Section R403.

Exception: Where *ductwork* ~~ducts~~ from an existing heating and cooling system ~~are~~ is extended into an *addition* Section R403.3.5 and Section R403.3.6 shall not be required.

Section 503 Alterations

Revise as follows:

R503.1.2 Heating and cooling systems. New heating and cooling systems and *ductwork* ~~duct systems~~ that are part of the alteration shall comply with Section R403 and this section . Alterations to ~~existing~~ heating and, cooling systems and *ductwork* ~~duct systems~~ shall comply with this section.

Exception: Where *ductwork* ~~ducts~~ from an existing heating and cooling system ~~are~~ is extended to an *addition*.

R503.1.2.1 ~~Ducts~~ Ductwork . HVAC *ductwork* ~~ducts~~ newly installed as part of an alteration shall comply with Section R403.

Exception: Where *ductwork* ~~ducts~~ from an existing heating and cooling system ~~are~~ is extended to an *addition*.

R503.1.2.3 Duct system leakage. Where an *alteration* includes any of the following, *duct systems* ~~ducts~~ shall be tested in accordance with Section R403.3.5 and shall have a total leakage

Copyright © 2021 International Code Council, Inc.

RED1 sed for the purpose of distributing supply air to a room, space or area.

Revise as follows:

CONDITIONED SPACE. An area, room or space that is enclosed within the *building thermal envelope* and is directly or indirectly heated or cooled. Spaces are indirectly heated or cooled where they communicate through openings with conditioned spaces, where they are separated from conditioned spaces by uninsulated walls, floors or ceilings, or through

6. For buildings where an Energy Rating Index score is determined in accordance with Section R406, the Energy Rating Index score, both with and without any on-site generation, shall be listed on the certificate.
7. The code edition under which the structure was permitted, the compliance path used, and where applicable, the additional efficiency measures selected for compliance with R408.
8. Where a solar-ready zone is provided, the certificate shall indicate the location, and dimensions.

R402.2.9 Basement walls. Basement wall(4 Tc2p9.)-9.6 [illegible] Tc 0.034 Tw 0.239 solumn 4 Tw 0.239 37 Tc

TABLE R402.5.1.1 AIR BARRIER, AIR SEALING AND INSULATION INSTALLATION[a]

Portions of table not shown remain unchanged.

COMPONENT	AIR BARRIER CRITERIA	INSULATION INSTALLATION CRITERIA
Shafts, penetrations	*Duct* ~~Duct~~ and flue shafts to exterior or unconditioned space shall be sealed. Utility penetrations of the air barrier shall be caulked, gasketed or otherwise sealed and shall allow for expansion, contraction of materials and mechanical vibration.	Insulation shall be fitted tightly around utilities passing through shafts and penetrations in the building thermal envelope to maintain required *R*-value.
Recessed lighting	Recessed light fixtures installed in the building thermal envelope shall be air sealed in accordance with Section R402.5.5.	Recessed light fixtures installed in the building thermal envelope shall be airtight and IC rated, and shall be buried in or surrounded with wi ( )Tj 0 0 0 rg BT /F1 1 Tf 0 Tc 0 Tw 0 Tz 0 TL 0 Tr 0 Ts 0.P <</MCID 101 >>BDC -0.

3. *Ductwork* located in

	***Duct systems* serving more than 1,000 ft² of conditioned floor area**		***Duct systems* serving ~~less than or equal to~~ 1,000 ft² ~~or less~~ of conditioned floor area**
	cfm/100 ft² (LPM/9.29 m²)		cfm (LPM)
	Number of ducted returns [a]		
	< 3	≥ 3	Any
Space conditioning equipment is not installed [b, ~~c~~]	3 (85)	4 (113~~.3~~)	30 (850 ~~849.5~~)
All components of the *duct system* are installed	4 (113~~.3~~)	6 (170)	40 (113~~32.7~~)
Space conditioning equipment is not installed, but the *ductwork* is located entirely in *conditioned space* [cd]	6 (170)	8(227)	60 (1699)
All components of the *duct system* are installed and entirely located in *conditioned space* [c]	8 (22~~76.6~~)	12(340)	80 2265~~.4~~)

a. A ducted return is a *duct* made of sheet metal or flexible *duct* that connects one or more return grilles to the return-side inlet of the *air-handling unit*. Any other ~~approach~~ method to convey air from return or transfer grille(s) to the *air-handling unit* does not constitute a ducted return for the purpose of determining maximum total *duct system* leakage allowance.

b. ~~Where the *space conditioning equipment* is not installed, *duct system* testing shall be permitted and shall include the measured leakage from both the supply and return *ductwork. Duct system* testing shall not be performed if the return *ductwork* is not installed.~~ *Duct system* testing is permitted where *space conditioning equipment* is not installed, provided the return *ductwork* is installed, and the measured leakage from the supply and return ductwork is included.

c. For *duct systems* to be considered inside a *conditioned space*, the d51 >>BDC 0 g/TT00 Tw2 1 Tf-0.024 J0-0.002 Tw th866 3 ( )t(d51 >>BDC 0j013c 0 Tw 3.478

SECTION R405
SIMULATED BUILDING PERFORMANCE

Revise as follows:

R405.3.2.1 Compliance report for permit application. A compliance report submitted with the application for building permit shall include the following:

1. Building street address, or other *building site* identification.
2. The name of the individual performing the analysis and generating the compliance report.
3. The name and version of the compliance software tool.
4. Documentation of all inputs ~~entered into~~ to the software used to produce the results for the reference design ~~and/~~or the rated home.
5. A certificate indicating that the proposed design complies with Section R405.3. The certificate shall document the building components' energy specifications that are included in the calculation including: component-level insulation0cTd( )Tj-0.034 Ts/T2Td( )maalc-c(l)-20u.1 (es)]TJ0 Tc 0 Tv

TABLE R405.4.2(1) SPECIFICATIONS FOR THE STANDARD REFERENCE AND PROPOSED DESIGNS

Portions of table not shown remain unchanged.

BUILDING COMPONENT	STANDARD REFERENCE DES/48 9t Td[(D)10.5 ((i8)-2.w 3.3 0 Td( )Tj731EMC ET/P /MCID 5 BDC q97.84 687.7230944 25.56 63m

provides thermal storage such as enclosed water columns, rock beds, or phase-change containers. A thermal storage element shall be in the same room as fenestration that faces within 15 degrees (0.26 rad) of true south, or shall be connected to such a room with pipes or ducts that allow the element to be actively charged.

d. For a proposed design with multiple heating, cooling or water heating systems using different fuel types, the applicable standard reference design system capacities and fuel types shall be weighted in accordance with their respective loads as calculated by accepted engineering practice for each equipment and fuel type present.

e. For a proposed design without a proposed heating system, a heating system having the prevailing federal minimum efficiency shall be assumed for both the standard reference design and proposed design.

f. For a proposed design home without a proposed cooling system, an electric air conditioner having the prevailing federal minimum efficiency shall be assumed for both the standard reference design and the proposed design.

g. For a proposed design the following assumptions shall be made for both the proposed design and standard reference design.

Fuel Type: Same as the predominant heating fuel type Rated

Storage Volume: 40 Gallons

-

Common wall area is the area of walls shared with an adjoining dwelling unit.

i. The factor for the compactness of the hot water distribution system is the ratio of the area of the rectangle that bounds the source of hot water and the fixtures that it serves (the “hot water rectangle”) divided by the floor area of the dwelling.

1. Sources of hot water include (cc1) -0.034 ( ) Tj 0.0491 0 0 85.39 4 Tw 0.1720 2d9 of

TABLE R405.4.2(2) DEFAULT DISTRIBUTION SYSTEM EFFICIENCIES

-

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	RED1308-22	Max. total duct system leakage

Copyright © 2021 International Code Council, Inc.