ICC
INTERNATIONAL
CODE COUNCIL®

REPI-21-21

IECC®: R401.2.5

Proponents: Vladimir Kochkin, representing NAHB (vkochkin@nahb.org)

2021 International Energy Conservation Code

Revise as follows:

R401.2.5 (N1101.13.5) Additional energy efficiency.

This section establishes additional requirements applicable to all compliance approaches to achieve additional energy efficiency.

1. For buildings complying with Section R401.2.1, one of the additional efficiency package options shall be installed according to Section R408.2.
2. For buildings complying under with Section R401.2.2, the building shall meet one of the following:
   2.1 One of the additional efficiency package Options in Section R408.2 shall be installed without including such measures in the proposed design under Section R405; or
   2.2 The proposed design of the building under Section R405.3 shall have an annual energy cost that is less than or equal to 95 percent of the annual energy cost of the standard reference design.
3.

Copyright © 2021 International Code Council, Inc.

REPI-131-21 – MOD1

IECC®: R406.4

Proponents:
Vladimir Kochkin, NAHB, representing NAHB (vkochkin@nahb.org)

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code

Code Change Proposal Tracking Sheet

Proposal #	REP-1132-21 ERI airflow rate
CDP ID #	296
Code	IECC RE
Code Section(s)	R406.4 New Section
Location	base
Proponent	Mike Moore mmoore@statorllc.com
Proposal Status	SC rev
Subcommittee	RE Econ, Model, Metric

Subcommittee Notes

Edits remove the equation for the ventilation

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	REPI124-21 Performance Path Airflow Rate
CDP ID #	272
Code	IECC RE
Code Section(s)	R405.4.2(1) table New Section
Location	base
Proponent	

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal # REPIe W n BT 10.2 (o)0o8oposal #

Copyright © 2021 International Code Council, Inc.

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	REP-1096-21 Mechanical ventilation testing
CDP ID #	417
Code	IECC RE
Code Section(s)	R403.6.3, R403.6.2.1, R403.6.2, New Section
Location	base
Proponent	Mike Moore mmoore@statorllc.com
Proposal Status	SC rev

Copyright © 2021 International Code Council, Inc.

Replacement for REP R403.6-21

Please replace REP R403.6-21 with the following language which greatly simplifies the proposal. This replacement language references ANSI/RESNET/ICC 380 (***Standard for Testing Airtightness of Building, Dwelling Unit, and Sleeping Unit Enclosures; Airtightness of Heating and Cooling Air Distribution Systems; and Airflow of Mechanical Ventilation Systems***) for the testing requirements. By referencing ANSI/RESNET/ICC 380, which is already referenced by the 2021 IECC, we can stipulate how the test needs to be performed (allowing us to remove redundant language in R403.6.3) and also the minimum accuracy of the test equipment (referencing an ANSI consensus standard for this).

2021 International Energy Conservation Code

R403.6.3 (IRC N1103.6.3) Testing. Mechanical ventilation systems shall be tested and verified to provide the minimum ventilation airflow rates required by Section R403.6 in accordance with ANSI/RESNET/ICC 380. ~~Testing shall be performed according to the ventilation equipment manufacturer's instructions, or by using a flow hood or box, flow grid, or other airflow measuring device at the mechanical ventilation fan's inlet terminals or grilles, outlet terminals or grilles, or in the connected ventilation ducts.~~ Where required by the code official, testing shall be conducted by an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the code official.

2 Td [(c)9.64 6ID 25 sh cted 72 529.26 234.78 0.66 re f 10/P 5dhi 5dw 5d 56(in-20)99.34 0.66BDC279 56(in-(w)4219.34

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	REPI140-21 Air Sealing Recirculation defrost
CDP ID #	420
Code	IECC RE
Code Section(s)	R408.2.5 New Section
Location	base
Proponent	Mike Moore mmoore@statorllc.com
Proposal Status	SC rev
Subcommittee	RE HVACR & WH

Subcommittee Notes

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	REP1085-21 Duct testing multifamily units
CDP ID #	521
Code	IECC RE
Code Section(s)	R403.3.5, R403.3.6, R403.3.7 (New), R403.3.8 (New), Section
Location	base
Proponent	Aaron Gary aaron.gary@texenergy.org
Proposal Status	SC rev
Subcommittee	RE HVACR & WH
Subcommittee Notes	vote to approve HVACR meeting 3/21/2022
Recommendation	Vote to approve as modified
Vote	9/2/1
Recommendation Date	3/21/2022
Next Step	To Subcommittee _____ To Advisory Group _____ To Consensus Committee yes _____
Consensus Committee	
Committee Response	

Affin3_____n3_____Vote

Vote

Copyright © 2021 International Code Council, Inc.

Where buildings qualify under the scope of Section R101.2 of the *International Residential Code*, each *duct system* in each *dwelling unit* shall be tested.

R403.3.7 Dwelling unit ~~S~~sampling ~~for R2 multifamily dwelling units~~.

For buildings with eight or more ~~testing units~~ *dwelling units* ~~complying with R403.3.5~~, the *duct systems* in the greater of seven ~~units~~ or 20 percent of the ~~testing units~~ *dwelling units* in the building shall be tested, including a top floor unit, a ground floor unit, a middle floor unit, and ~~a~~ the unit with the largest ~~testing unit~~ ~~floor area~~ *conditioned floor area*. Where buildings have fewer than eight *dwelling units*, the duct systems in each unit shall be tested. Where the leakage rate of a *duct system* is greater than the maximum permitted leakage rate, corrective actions shall be made to the system and the system retested until it passes. For each ~~tested unit~~ *dwelling unit* that exceeds the maximum permitted ~~duct~~ leakage rate, an additional three ~~units~~ *dwelling units*, including the corrected unit, shall be tested~~, including a mixture of testing unit types and locations~~. ~~Where buildings have fewer than eight testing units, each testing unit shall be tested.~~

Where buildings qualify under the scope of Section R101.2 of the *International Residential Code*, each *duct system* in each *dwelling unit* shall be tested.

Copyright © 2021 International Code Council, Inc.

REPI-61-21 (Modification replaces version in the monograph)

IECC®: R402.4.1, R402.4.1.4 (New)

Proponents: Aaron Gary, representing Self (aaron.gary@texenergy.org)

2021 International Energy Conservation Code

Revise as f ollows:

R402.4 Air leakage. The *building thermal envelope* shall be constructed to limit air leakage in accordance with the requirements of Sections R402.4.1 through R402.4.5.

R402.4.1 Building thermal envelope. The *building thermal envelope* shall comply with Sections R402.4.1.1 through R402.4.1.3. The sealing methods between dissimilar materials shall allow for differential expansion and contraction.

R402.4.1.1 Installation. The components of the *building thermal envelope* as indicated in Table R402.4.1.1 shall be installed in accordance with the manufacturer's instructions and the criteria indicated in Table R402.4.1.1, as applicable to the method of construction. Where required by the code official, an approved third party shall inspect all components and verify compliance.

R402.4.1.2 Testing.

The *building* or <u>each</u> *dwelling unit* <u>in the *building*</u> shall be tested for air leakage. The maximum air leakage rate for any *building* or *dwelling unit* under any compliance path shall not exceed 5.0 air changes per hour or 0.28 cubic feet per minute (CFM) per square foot [0.0079 m3/(s × m2)] of dwelling unit enclosure area. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380, ASTM E779 or ASTM E1827 and reported at a pressure of 0.2 inch w.g. (50 Pascals). Where required by the *code official*gbt(c)-1.7[(r)0.7 0ucred by182762 0 T.1w 0.317 0b079 mPast 0e1(7 fondnc) -14 g(t)5(.)[0ed by)3[(1k)-1.7 (age f)5 0bit g.. (t)3.(02 Tc 0.093 Tw-28.15 182762 0 Td g in acct e

Copyright © 2021 International Code Council, Inc.

Exception: Where tested in accordance with R402.4.1.4, testing of each *dwelling*

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code

Code Change Proposal Tracking Sheet

Proposal #	REP1063-21 Air Tightness improvements
CDP ID #	312
Code	IECC RE
Code Section(s)	R402.4.1.2, R402.4.1.3, TABLE R405.4.2(1), New Section
Location	base
Proponent	William Fay bill@energyefficientcodes.org
Proposal Status	SC rev
Subcommittee	RE Envelope
Subcommittee Notes	Aims to limit air leakage in warmer climates, some discussion on whether it should be even lower.

Recommendation

Alison Lindberg motions to approve and Joel Martell seconded

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	REP-1064-21 Air Tightness improvements
CDP ID #	299
Code	IECC RE
Code Section(s)	R402.4.1.2, R402.4.1.3, TABLE R405.4.2(1), R408.2.5 New Section
Location	base
Proponent	William Fay bill@energyefficientcodes.org

Copyright © 2021 International Code Council, Inc.

5. Heating and cooling systems, where installed at the time of the test, shall be turned off.
6. Supply and return registers, where installed at the time of the test, shall be fully open.

Exception: When testing individual dwelling units, an air leakage rate not exceeding 0.30 cubic feet

Copyright © 2021 International Code Council, Inc.

Copyright © 2021 International Code Council, Inc.

REPI60-21 (this modification replaces what is in the monograph)

IECC®: R402.4.1.2

Proponents: Robby Schwarz, BUILDTank, Inc., representing Colorado Chapter of the ICC (robby@btankinc.com)

2021 International Energy Conservation Code

Revise as follows:

R402.4.1.2 (N1102.4.1.2) Testing.

The building or dwelling unit shall be tested for air leakage. The maximum air leakage rate for any building or dwelling unit under any compliance path shall not exceed ~~5.0~~ 4.0 air changes per hour or ~~0.28~~ ~~0.19~~ 0.22 cubic feet per minute (CFM) per square foot [0.0063 ~~0.0079~~ $m^3/(s \times m^2)$] of dwelling unit enclosure area. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380, ASTM E779 or ASTM E1827 and reported at a pressure of 0.2 inch w.g. (50 Pascals). Where required by the code official, testing shall be conducted by an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the code official. Testing shall be performed at any time after creation of all penetrations of the building thermal envelope.

Copyright © 2021 International Code Council, Inc.

Copyright © 2021 International Code Council, Inc.21

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	REP-039-21 Attic knee or pony wall
CDP ID #	375
Code	IECC RE
Code Section(s)	R402.2.3 (New), Table R402.4.1.1 (New), TABLE R405.2, TABLE R406 (New), Section
Location	base
Proponent	Robby Schwarz robby@btankinc.com
Proposal Status	SC rev
Subcommittee	RE Envelope
Subcommittee Notes	provides more details on how to insulate knee walls, adds additional clarity for these spaces
Recommendation	Motion to approve Rob Buchanan, Chris Mathis seconded Reason: assembly often overlooked and with low compliance rates. Language has issues but it's necessary.
Vote	10-8-0
Recommendation Date	3/16/22
Next Step	To Subcommittee _____ To Advisory Group _____ To Consensus Committee X _____
Consensus Committee	
Committee Response	

Copyrig ht © 2021 International Code Council, Inc.

Raised ceiling that protrude into the attic are unique knee wall applications on which the code offers no guidance. They are particularly troublesome for maintaining the continuity of the building thermal envelope and therefore have been added to this section as a means to define when the vertical or diagonal surface must be treated as a knee wall and when attic insulation can be mounded over the raised ceiling.

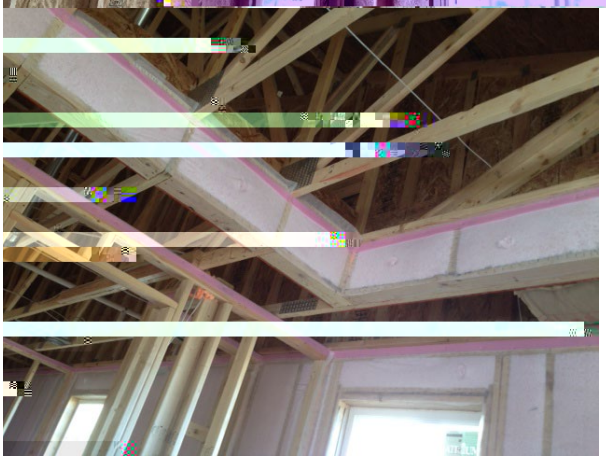

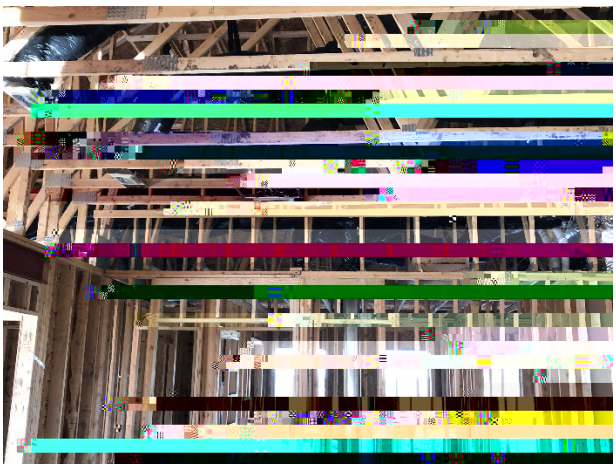

Copyrig ht © 2021 International Code Council, Inc.

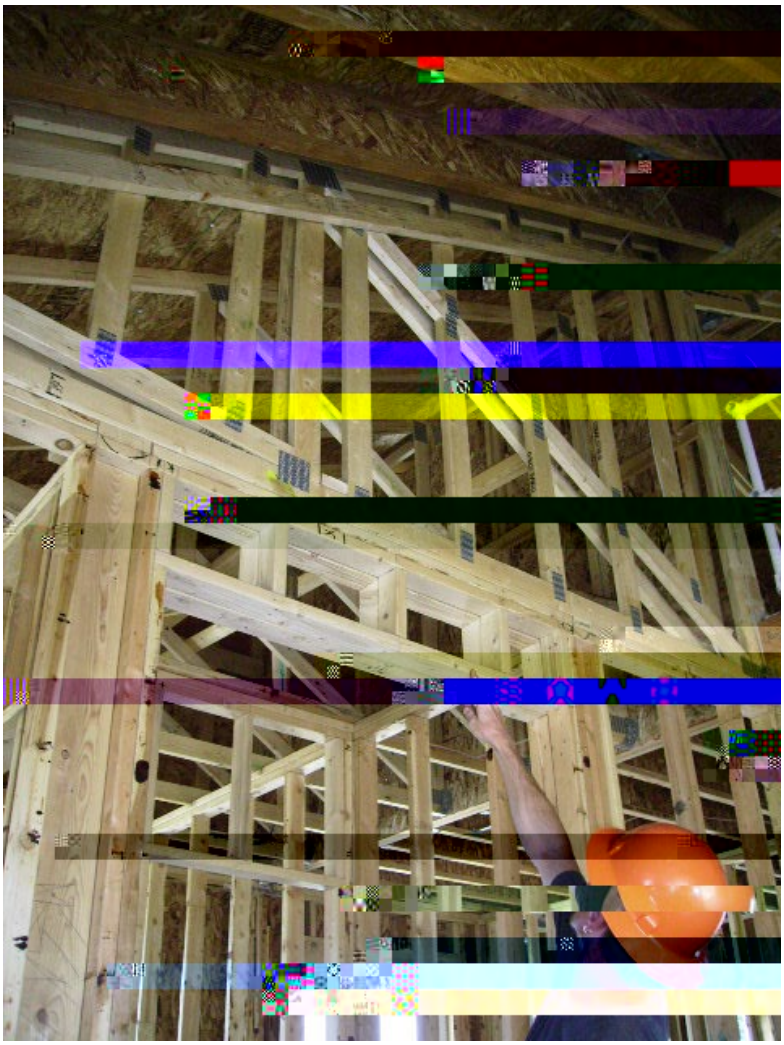

Cost

Copyrig ht © 2021 International Code Council, Inc.

In theory, this assembly has been addressed as an above grade wall so this new section of code should not add cost to the construction of a home. In reality, this assembly has not been

Copyrig ht © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change Proposal Tracking Sheet

Proposal #	REP1044-21 Thermal Envelope Installation
CDP ID #	229
Code	IECC RE
Code Section(s)	R402.4.1.1 New Section
Location	base
Proponent	Charles Haack chaack@naima.org
Proposal Status	SC rev
Subcommittee	RE Envelope
Subcommittee Notes	Proponent recommends disapproval and says proposal is not ready at this time.
Recommendation	Motion to disapprove Parks, Johnson Seconded. Reason: Proponent says not ready
Vote	18-0-0
Recommendation Date	3/16/22
Next Step	To Subcommittee_____ To Advisory Group_____ To Consensus Committee x_____
Consensus Committee	
Committee Response	
Vote	Affirmative_____ Negative_____ Table_____ To Subcommittee_____
Date	

Copyright © 2021 International Code Council, Inc.

International Energy Conservation Code
Code Change P roposal Tracking Sheet

Proposal #

Copyright © 2021 International Code Council, Inc.

visibility of the circuit directory label, service disconnect label or other required labels. The certificate shall indicate the following:

1. The predominant R-values of insulation installed in or on ceilings, roofs, walls, foundation components such as slabs, basement walls, crawl space walls and floors and ducts outside conditioned spaces.
2. U-factors of fenestration and the solar heat gain coefficient (SHGC) of fenestration. Where there is more than one value for any component of the building envelope, the certificate shall indicate both the value covering the largest area and the area weighted average value if available.
3. The results from any required duct system and building envelope air leakage testing performed on the building.
4. The types, sizes and efficiencies of heating, cooling and service water-heating equipment. Where a gas-fired unvented room heater, electric furnace or baseboard electric heater is installed in the residence, the certificate shall indicate “gas-fired unvented room heater,” “electric furnace” or “baseboard electric heater,” as appropriate. An efficiency shall not be indicated for gas-fired unvented room heaters, electric furnaces and electric baseboard heaters.
5. Where on-

Copyright © 2021 International Code Council, Inc.

~~CARBON DIOXIDE EQUIVALENT (CO2e).~~ ~~A measure used to compare the impact of various greenhouse gases based on their global warming potential (GWP). CO2e approximates the timeintegrated warming effect of a unit mass of a given greenhouse gas relative to that of carbon dioxide (CO2). GWP is an index for estimating the relative global warming contribution of atmospheric emissions of 1 kg of a particular greenhouse gas compared to emissions of 1 kg of CO2. The following GWP values are used based on a 100-year time horizon: 1 for CO2, 25 for methane (CH4), and 298 for nitrous oxide (N2O). [Carbon Dioxide Equivalent Definition courtesy of New Buildings Institute]~~

Copyright © 2021 International Code Council, Inc.

1. 2.839 kgCO2e/sf from electricity usage;
2. 1.181 kgCO2e/sf from natural gas usage;
3. 0.119 kgCO2e/sf from liquefied petroleum gas usage; and
4. 0.150 kgCO2e/sf from fuel oil usage.

https://www.epa.gov/energy/greenhouse-gases-equivalencies-calculator-calculations-andreferences

2. Multiply building or dwelling unit square footage by the EPA Estimated Home Energy Use values to calculate the building or dwelling annual operational kgCO2e emissions for documentation per R103.2 and R401.3.
3. Results shall separately indicate building or dwelling annual operational kgCO2e emissions from electric energy usage and fossil fuel energy usage for documentation per R103.2 and R401.3.

Reason:

To improve occupant health and safety, improve energy efficiency, and decrease greenhouse gas emissions. An example as to how to calculate CO2e annual emissions is as follows.

Example:

A 2,000 square foot new construction or renovation project will be appropriately documented, filed with authorities having jurisdiction, and constructed.
There will not be an ANSI/RESNET/ICC 301 Energy Rating Certification and its standard supporting analysis performed as part of the project.
The project's annual emissions from electric usage equate to 5,678.184 kgCO2e (2,000 x 2.839).
The project's annual emissions from natural gas usage equate to 2,362.042 kgCO2e (2,000 x 1.181).
The project's annual emissions from liquefied petroleum gas usage equate to 237.236 kgCO2e (2,000 x 0.119).
Therefore, the project's annual emissions from fuel oil usage equate to 299.123 kgCO2e (2,000 x 0.150).
Therefore, the project's CO2e annual emissions from electric energy usage is 5,678.184 kgCO2e and from fossil fuel energy usage is 2,898.401 kgCO2e (2,362.042 + 237.236 + 299.123) for documentation per R103.2 and R401.3.

Bibliography:

Based on professional knowledge and experience, feedback from other professionals, established research, and established local and national construction quality frameworks

Cost Impact:

The code change proposal will neither increase nor decrease the cost of construction.
This code chance proposal is understood to neither increase nor decrease the cost of construction

Copyright © 2021 International Code Council, Inc.

Proponents: Jay Crandell, P.E., ABTG/ARES Consulting, representing Foam Sheathing Committee of the American Chemistry Council (jcrandell@arescorporation.com)

2021 International Energy Conservation Code

CONSTRUCTION DOCUMENTS. Written, graphic and pictorial documents prepared or assembled for describing the design, location and physical characteristics of the elements of a project necessary for obtaining a building *permit*.

Revise existing definition as follows:

~~ing any damaged substrate and~~ ROOF REPLACEMENT. ~~The process of removing the existing roof covering, repair~~ ~~vers of roof assembly materials~~ ~~installing a new roof covering.~~ An alteration that includes the removal of all existing la ement materials above the existing roof deck. down to the roof deck and installing replac

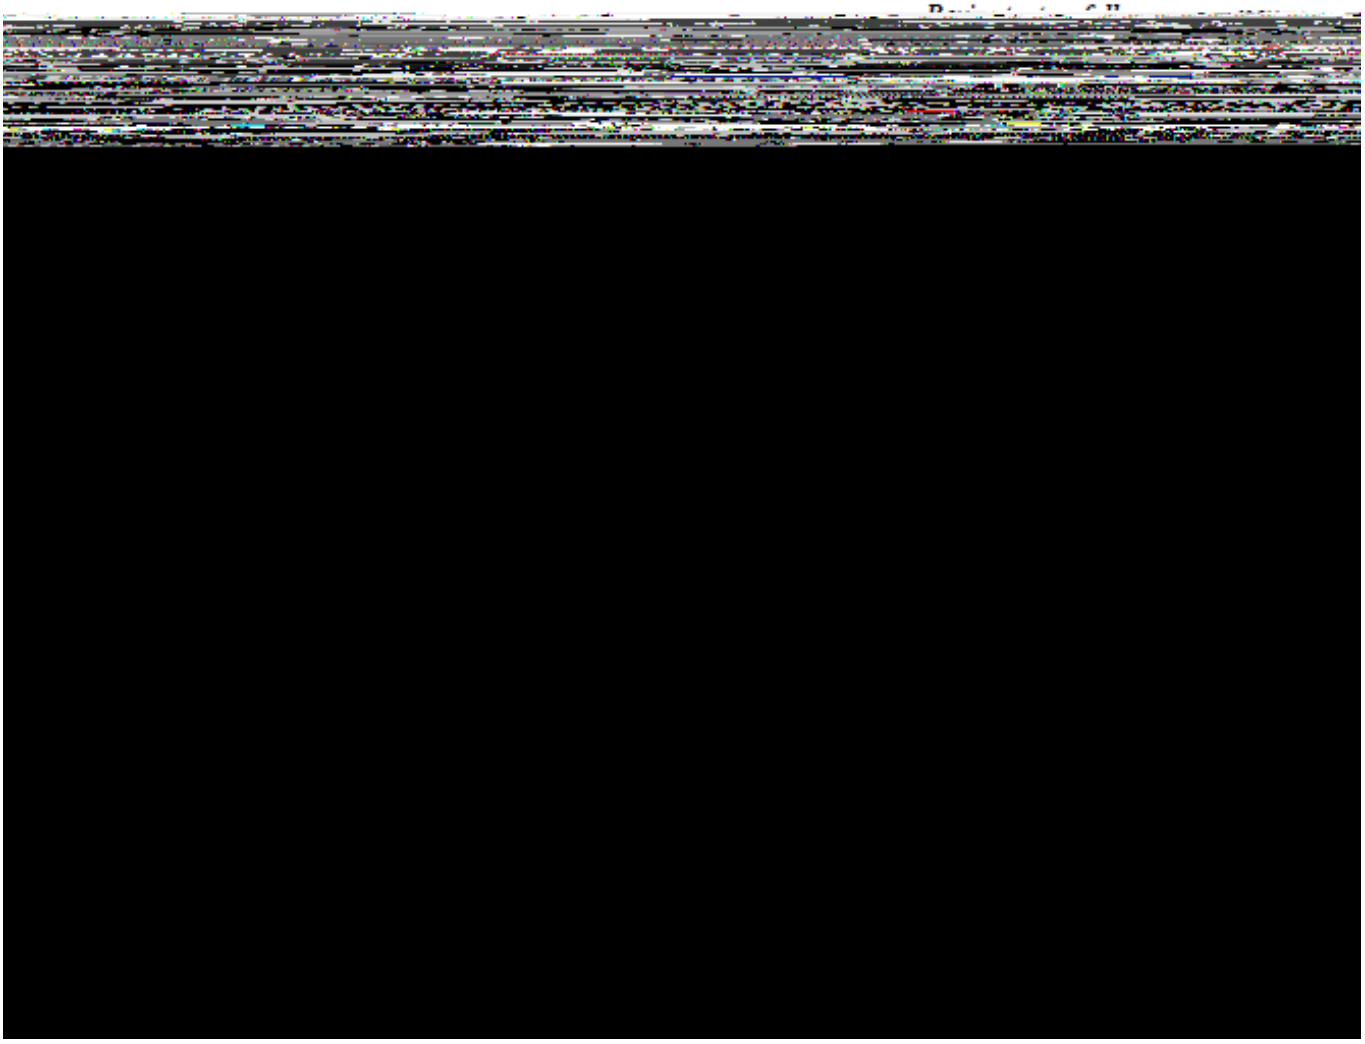

Copyright © 2021 International Code Council, Inc.

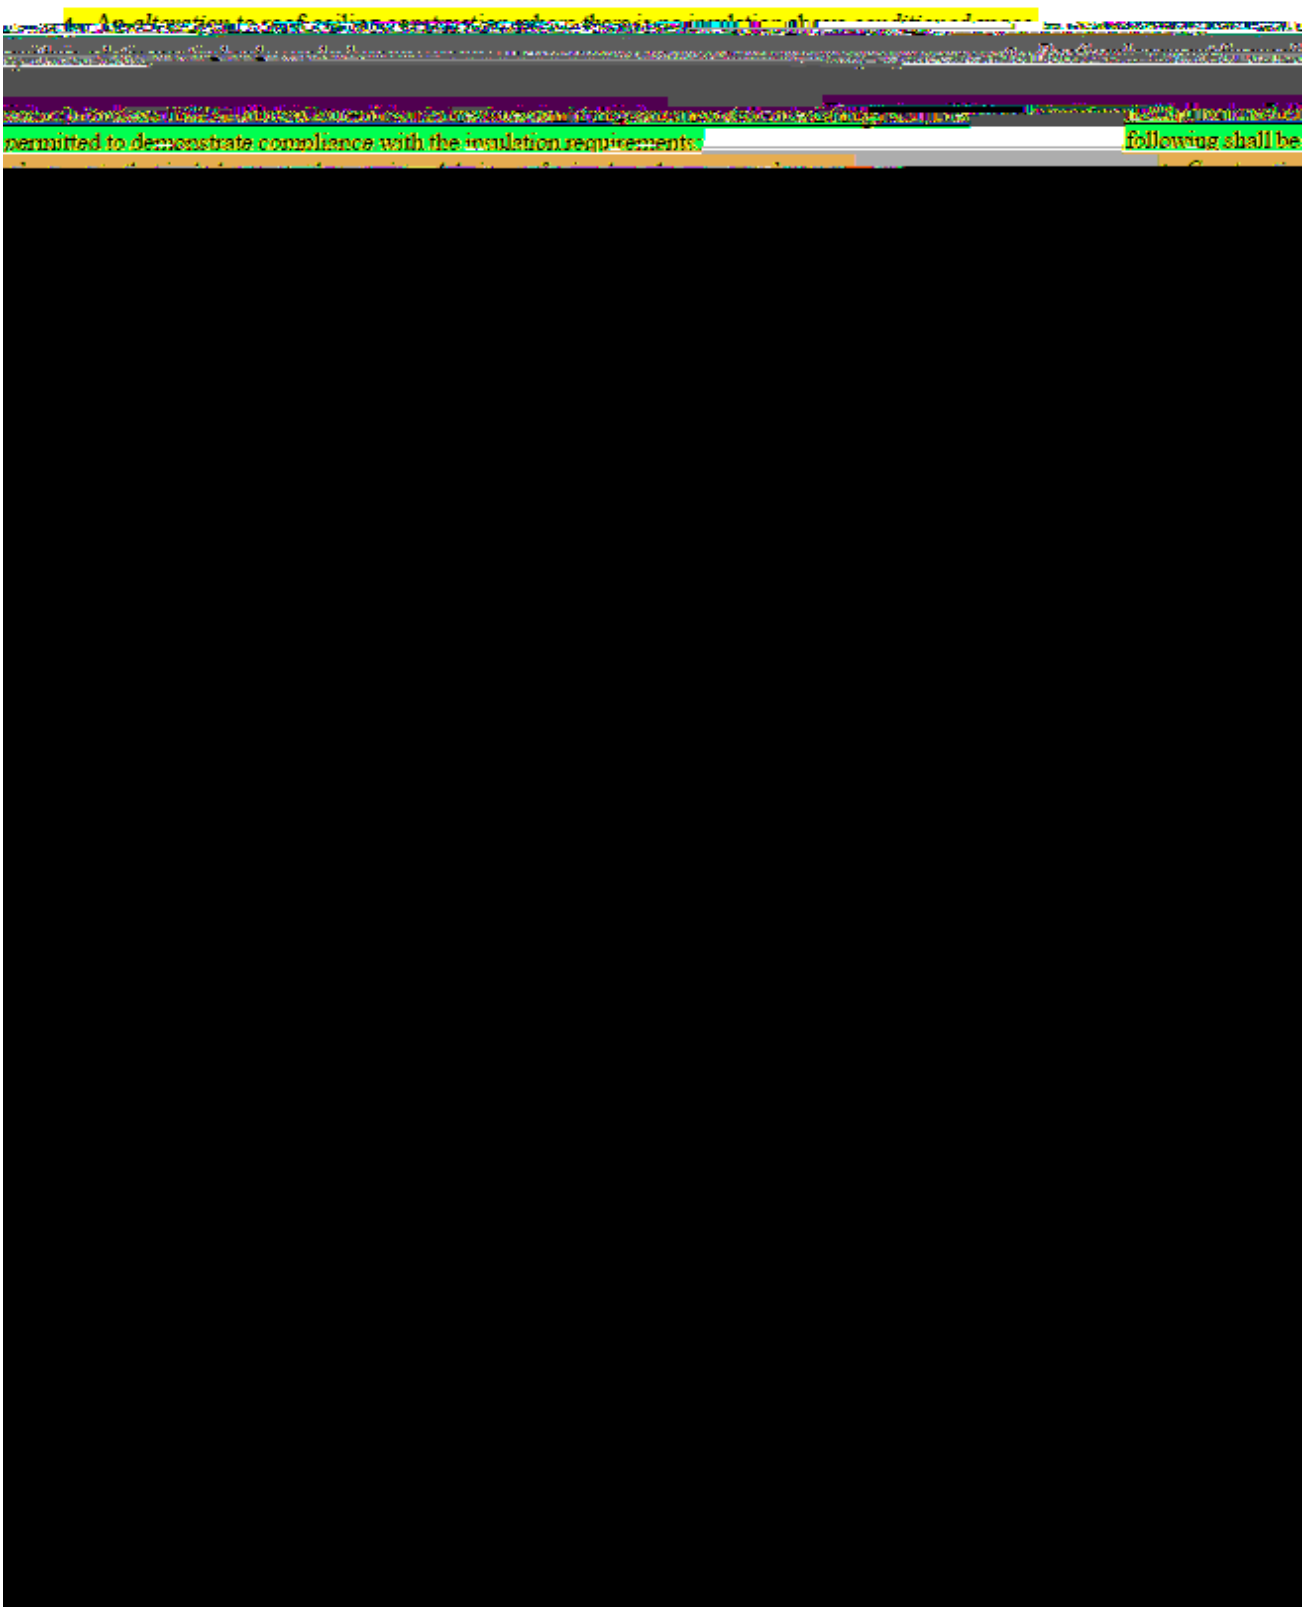

Copyright © 2021 International Code Council, Inc.

TABLE R402.1.3

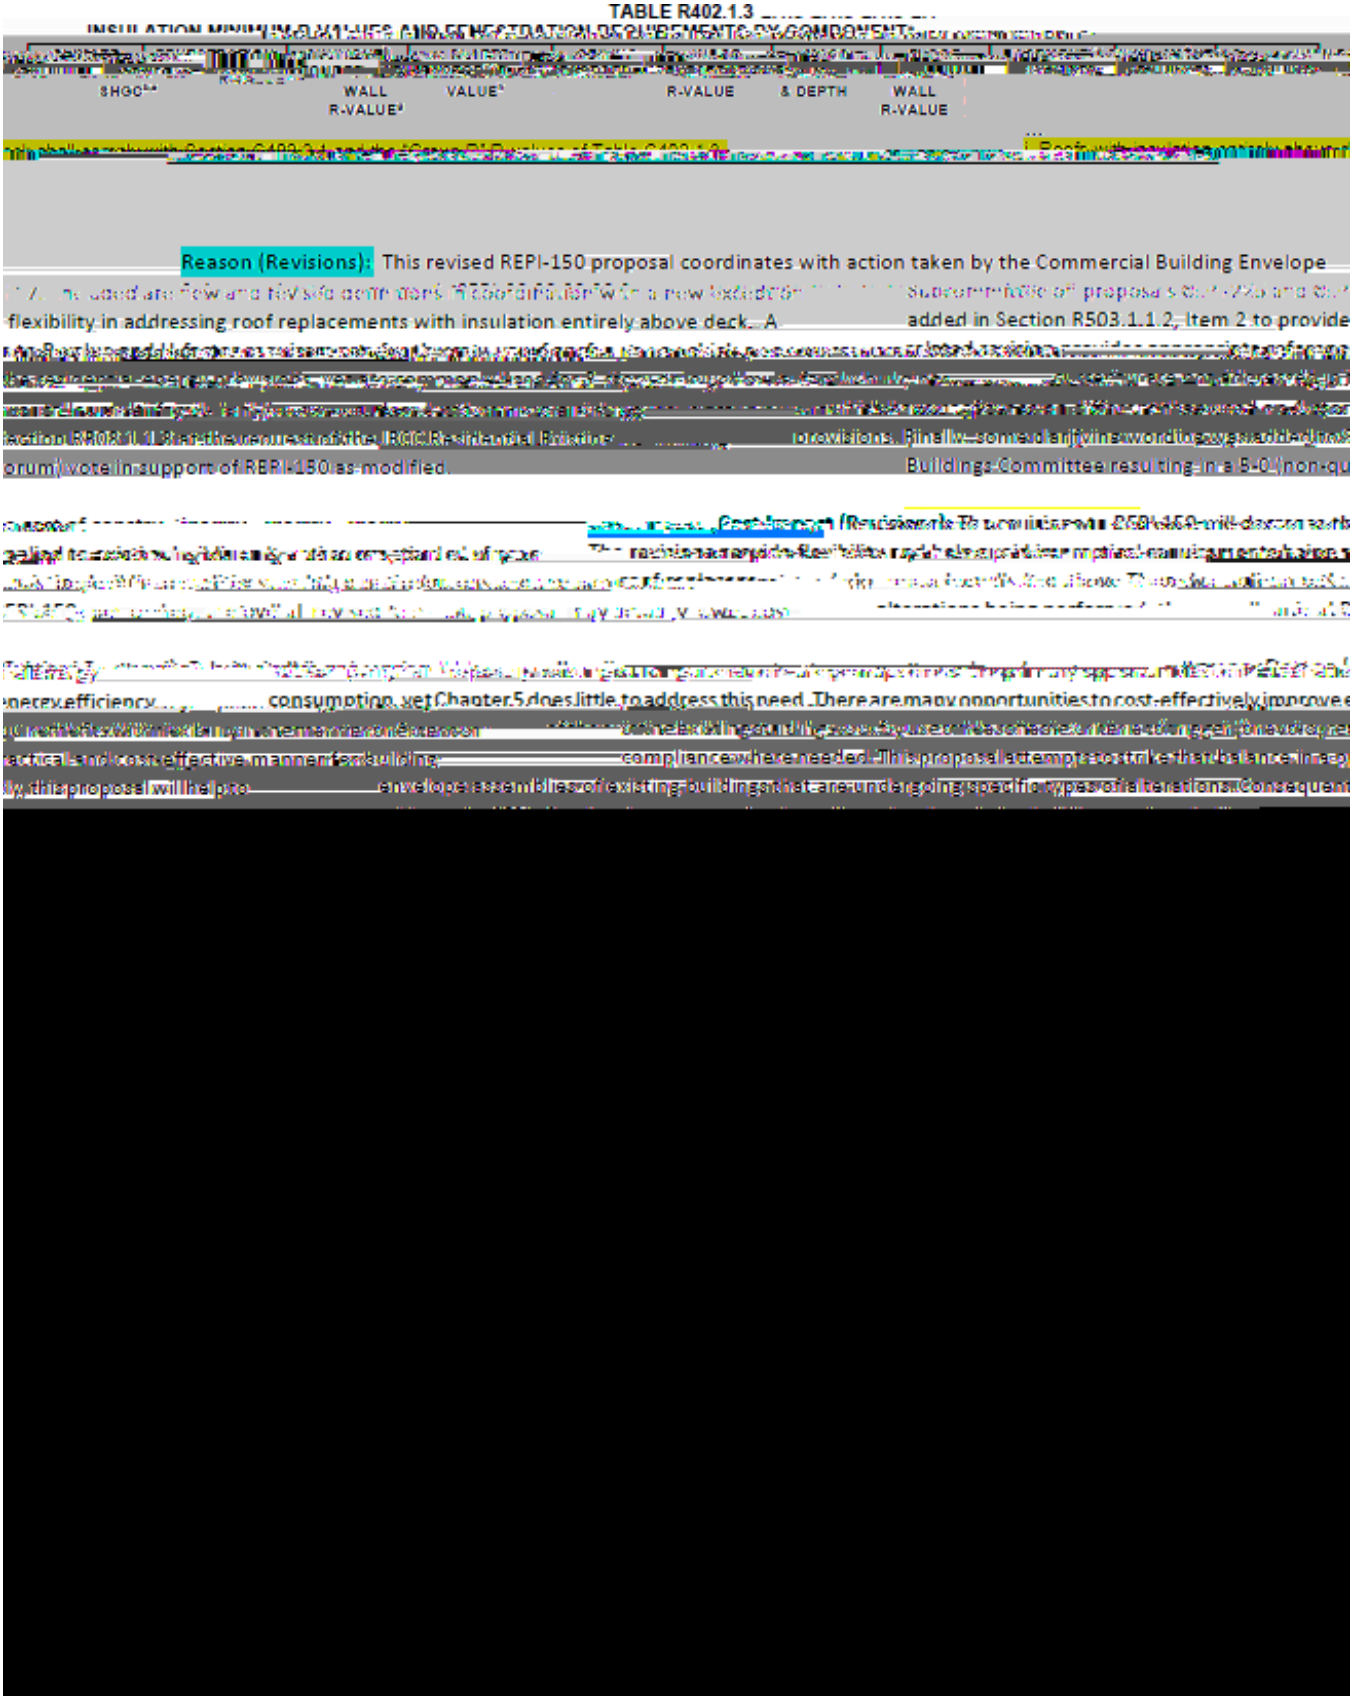

Reason (Revisions): This revised REPI-150 proposal coordinates with action taken by the Commercial Building Envelope

flexibility in addressing roof replacements with insulation entirely above deck. A added in Section R503.1.1.2, Item 2 to provide

provisions. Finally, some language words were added

Buildings Committee resulting in a 5-0 (non-qu

compliance where needed. This proposal attempts to strike that balance in a

envelope assemblies of existing buildings that are undergoing specific types of alterations. Consequent

Copyright © 2021 International Code Council, Inc.

required.

Cost Impact: The code change proposal will increase the cost of construction.

Copyright © 2021 International Code Council, Inc.